



The VOLMER Engineering machine range

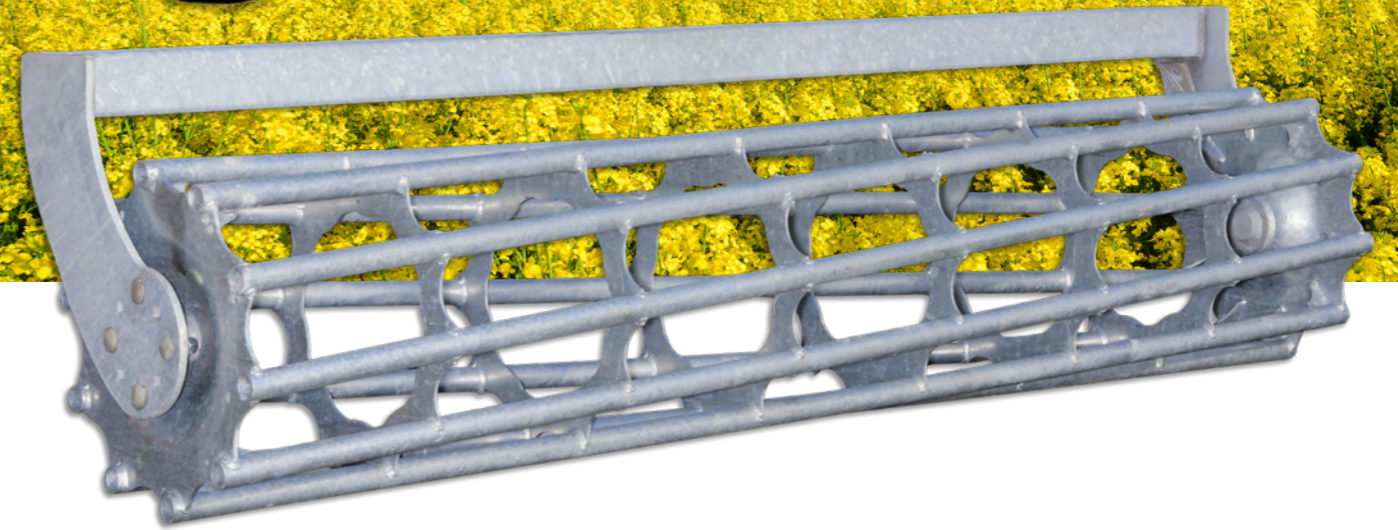

VOLMER[®]
ENGINEERING

T-RUBBER
ACCESSORIES

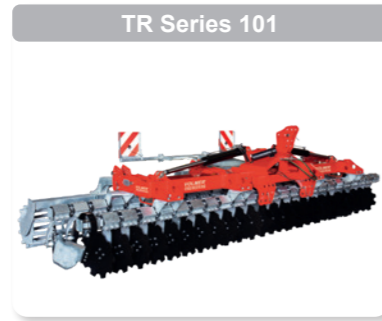

ACCESSORIES

Your contact persons



Bernd Volmer



Thomas Volmer



Dirk Rygol



Thomas Fehmer



Mathias Theil



VOLMER ENGINEERING GmbH

Lingener Damm 229
48429 Rheine

www.volmer-engineering.com

Tel. +49 59 71 94 632-0
Fax +49 59 71 94 362-90

info@volmer-engineering.com

www.volmer-engineering.com

12. Swivel arm

- Six inch swivel arm for tubing
- Stable swivel joint at connection
- Installation point for flow meter
- Hydropneumatic suspension for height adjustment when pulling the hose

11. Power-Lift

- The centre of gravity of the short disc harrow is shifted to the front.
- The top link does not carry a load, so less weight is on the rear axle of the towing vehicle.

10. Harrow

- Harrow instead of rollers (only with sensing wheels)

8. Edge disc

6. Feeler wheels

- Available as single and double sensing wheel

7. Edge plates

- Front and/or rear edge plates

1. Slurry distributor

- Extra low slurry distributor for tractor vehicles with own hosing arm.

2. Spreader

- Intercrop spreader with baffle plates.

3. Height adjustment

- Hydraulic adjustment of the working depth.

4. Receptacles

- Firmly welded mountings for dome triangle or as three-/four-point suspension available.

5. Tube bar, spring and U-profile rollers

9. Info

	SERIES 101	SERIES 1000
Rollers	2 pieces	3 pieces
Power lift axle	1 wheel	2 wheels
Hydraulic height adjustment	4 cylinders	6 cylinders
Feeler wheels 1 wheel	✓	-
Feeler wheels 2 wheels	✓	✓
Coupling triangle	✓	only 7 m
Four-point linkage	✓	-
Intercrop spreader	✓	✓

	Unit of measurement	PIPE BAR ROLLER	PIPE BAR ROLLER	SPRING ROLLER	U-PROFILE ROLLER
Diameter	mm	550	650	580	560
Approx. weight per metre with frame	kg	85	110	155	110 plus ground in U-profile
Rust protection		galvanised	galvanised	RAL 9005	RAL 9005
Rings at 3 m	piece	8	7	15	16